

HIGH PRESSURE GAS SWITCHES

MODEL-H SERIES




HGP-H

1 P.S.I. to 15 P.S.I. Adjustable Range and 35 P.S.I. Maximum Surge Pressure

The design and function of the new high pressure gas switches are based on the same principles of reliability, repeatability, and accuracy that has made Antunes Controls existing line of pressure switches so successful. The high pressure gas switch monitors gas pressure and cuts off the electrical control circuit when

pressure drops below or rises above the desired pre-set point. The switches mount horizontally (stem down) and do not require accurate leveling. Available in automatic recycle or manual reset and features an easily visible on-off indicator.

PHYSICAL DIMENSIONS

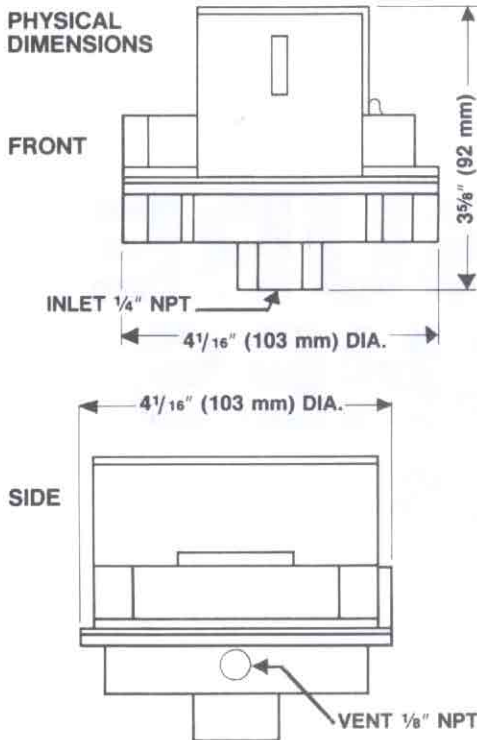


MODELS	RANGES		NATURAL OR L.P. GAS	AUTOMATIC OR MANUAL RESET	FIELD ADJUSTABLE
	P.S.I.	BAR			
HGP-H	1-7	.07-.48	YES	MANUAL	YES
	6-15	.41-1.03	YES	MANUAL	YES
RHGP-H	1-7	.07-.48	YES	AUTOMATIC	YES
	6-15	.41-1.03	YES	AUTOMATIC	YES
LGP-H	1-7	.07-.48	YES	MANUAL	YES
	6-15	.41-1.03	YES	MANUAL	YES
RLGP-H	1-7	.07-.48	YES	AUTOMATIC	YES
	6-15	.41-1.03	YES	AUTOMATIC	YES

MODEL AVAILABLE: HGP-H high pressure, LGP-H low gas pressure switches are Reset type which must be manually reset to operate after the electrical circuit has been broken.

MODEL AVAILABLE: RHGP-H and RLGP-H operate in the same manner but will Recycle automatically when gas pressure is brought back to the proper level.

SELECT the range either high or low gas pressure and whether you need a Reset or Recycle model to meet your requirements.

MOUNTING is horizontal stem down, but does not require accurate leveling. Mounting directly to 1/4" N.P.T. gas inlet. Panel mounting, order optional mounting bracket.

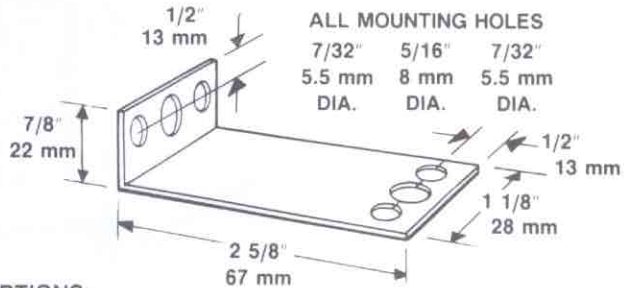

OPTIONS:
PANEL MOUNT Specify "Mounting Bracket" on order.
DUST PROOF: Specify "Dust Proof" on order.

ELECTRICAL RATING

10 A, 1/8 HP, 125 VAC
 5 A, 1/4 HP, 250 VAC
PILOT DUTY: 125 VA, 125-250 VAC

ALL MODELS

Max. surge pressure 35 P.S.I. Max. ambient temperature 140° F 60° C. Min. Ambient temperature -40° F/-40° C.

LIMITATION OF LIABILITY. It is understood and agreed that seller's liability whether in contract, in tort, under any warranty, in negligence or otherwise shall not exceed the return of the amount of the purchase price paid by purchaser and under no circumstances shall seller be liable for special,

indirect or consequential damages. The price stated for the equipment is a consideration in limiting seller's liability. No action, regardless of form, arising out of the transactions may be brought by purchaser more than one year after the cause of action has accrued.

ANTUNES CONTROLS

DIVISION OF A.J. ANTUNES & CO.

180 KEHOE BLVD. • CAROL STREAM, ILLINOIS 60188 USA • 1-800-253-2991
 www.antunescontrols.com